




水路用L型

側壁と底板の一部を構成するL形ブロックを左右両側に設置して、底板を現場打ち鉄筋コンクリートによって連結するプレキャスト式L型水路です。

[形状図]

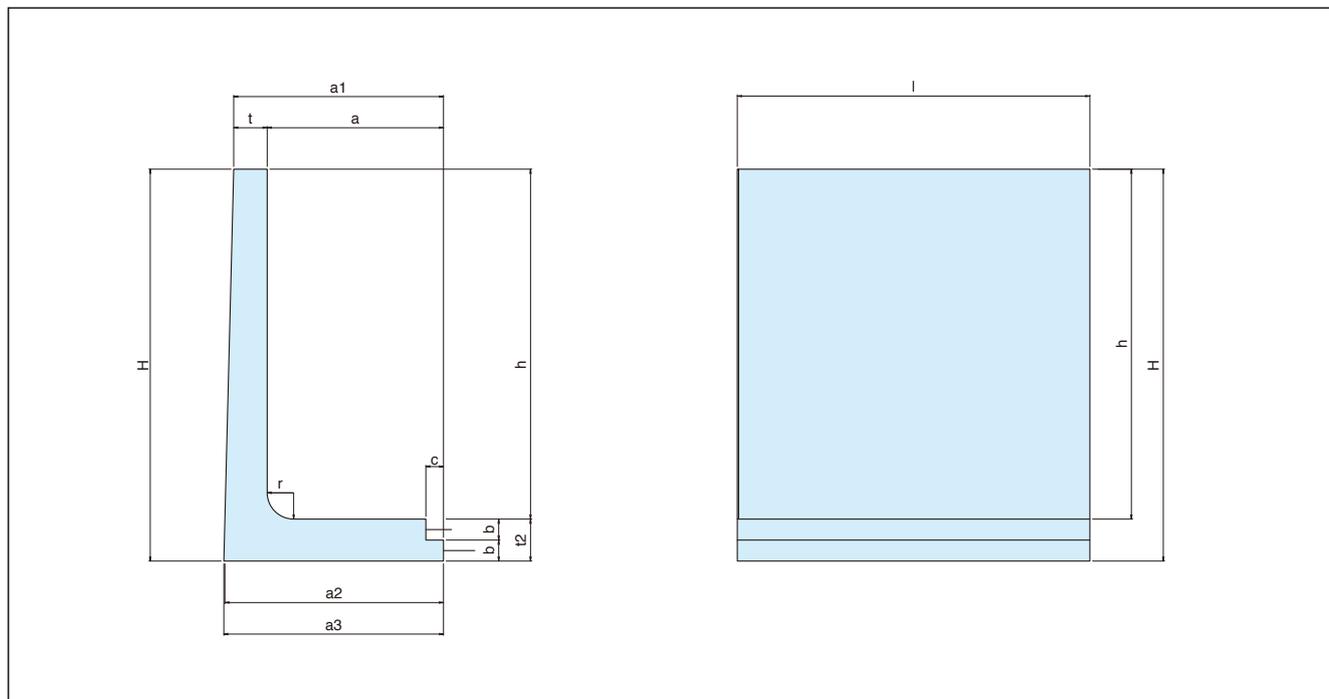

[規格表]

呼び名	種類	h	a	a1	a2(1)	a3(1)	t	t1	t2	b	c	r	H	l
1000	I	1000	420	520	540	542	100	120	120	-	-	80	1120	2000
	II													
	III													
1200	I	1200	420	530	560	564	110	140	140	-	-	80	1340	2000
	II													
	III													
1400	I	1400	500	620	655	659	120	155	155	-	-	100	1555	2000
	II													
	III													
1600	I	1600	800	944	980	984	144	180	180	90	100	150	1780	2000
	II													
	III													
1800	I	1800	800	955	1000	1005	155	200	200	100	100	150	2000	2000
	II													
	III													
2000	I	2000	1000	1190	1240	1246	190	240	240	120	100	150	2240	2000
	II													
	III													
2200	I	2200	1000	1209	1260	1266	209	260	260	130	100	150	2460	2000
	II													
	III													
2400	I	2400	1000	1180	1280	1292	180	280	280	140	100	150	2680	2000
	II													
	III													
2600	I	2600	1000	1200	1300	1312	200	300	300	150	100	150	2900	2000
	II													
	III													

注(1)：底板部の形状、寸法のうち、a2及びa3については、いずれを用いてもよい。なお、側壁背面下部に面取りをしてもよい。